

Product Code:

LDG30


 RoHS
Compliant

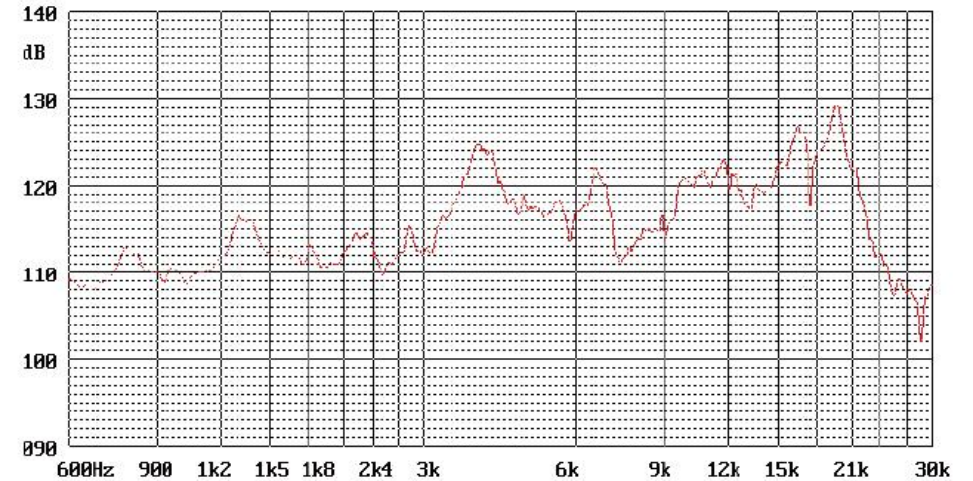
Picture:

Specification:

Rated Voltage	(Vp-p)	5.5
Operating Voltage	(Vp-p)	1~30
*Sound Output at 50cm	(dB)	≥90
Resonance Frequency	(KHz)	25.0±5.0
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	2.5
Cone		Mylar
RoHS		Yes

*Value applying at 5.5Vp-p, 25KHz sine wave

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Frequency Response:

Dimensions (Unit: mm)

Tolerance: ±0.5mm Except Specified

